

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/087065 A1**

(51) International Patent Classification<sup>7</sup>: **A47J 27/62**

(21) International Application Number:  
PCT/IT2004/000121

(22) International Filing Date: 12 March 2004 (12.03.2004)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicant (for all designated States except US):  
**BIALETTI INDUSTRIE S.p.A.** [IT/IT]; Via Fogliano 1,  
I-25030 Coccaglio (Brescia) (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RANZONI,**  
Francesco [IT/IT]; c/o Bialetti Industrie S.p.A., Via  
Fogliano 1, I-25030 Coccaglio (Brescia) (IT).


(74) Agents: **VITTORANGELI, Lucia et al.**; Jacobacci &  
Partners S.p.A., Via Senato, 8, I-20121 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A DEVICE FOR HEATING LIQUIDS, IN PARTICULAR MILK

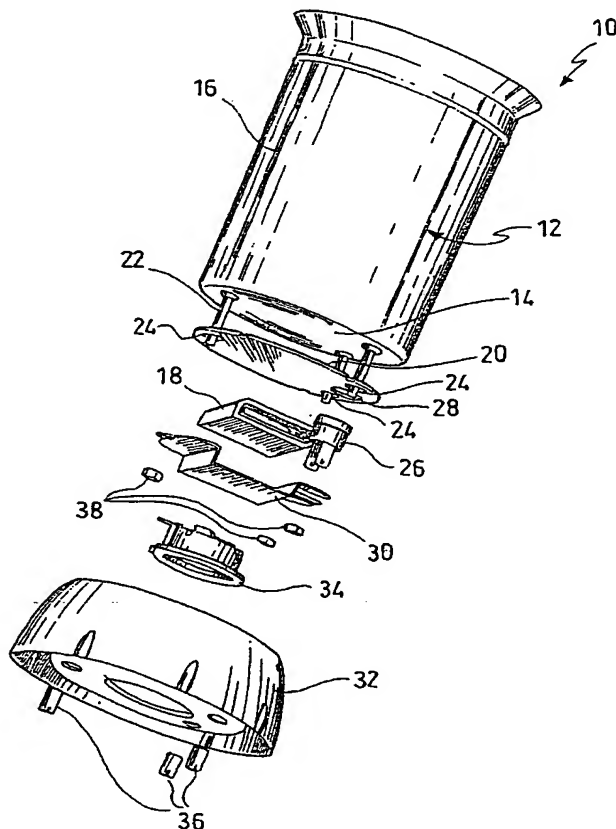

(57) Abstract: A device for heating liquids (10), particularly milk, comprising a container (12) for the liquid to be heated operatively associated with heating means. The latter comprise a heating element (18) delivering variable power over time as a function of the temperature reached by the liquid. Particularly, the heating element (18) is suitable to reduce the power supplied with the increasing temperature of the liquid and is positioned so as to heat the bottom (14) of said container (12).

WO 2005/087065 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*